

Accessories

Accessories	Model	Function	Compatibility
Water temperature sensor	HTS-E1000A1	Water temperature sensor for pipeline, tank and hydraulic components.	Hi-Therma Series
3-way valve	HESE-3W25A	Valve to divert different water flow for different operation	Hi-Therma Series
Hi-Mit II adapter	HCCS-H64H2C1M#01	Hi-Mit II smart APP solution.	Hi-Therma Series
Thermal tank	HDHWT-200L30HE HDHWT-300L30HE	DHW Tank	Hi-Therma Series
Indoor ambient temperature sensor	HCT-S01E	Wall mounted room temperature sensor, with communication to heat pump system.	Hi-Therma Series
Wired remote controller	HSXE-VC04	Room thermostat for room temperature control, with communication to heat pump system.	Hi-Therma Series
Second outdoor ambient temperature sensor	HC-T-01M	Detect Outdoor ambient temperature with the second sensor	Hi-Therma Series
Electronic anode	HOPT-EAT01	Protect the inner tank of the water heater, enhance its corrosion resistance, and prolong its service life.	Hi-Therma Integra
Colorful touch controller	HSXM-FE01	Touch controller for room temperature control and mode adjustment with communication to heat pump system.	Hi-Therma Integra & Split (only for 10~16kW)

Hisense

Qingdao Hisense HVAC Equipment Co., Ltd.
Hisense Tower, Qingdao, China

<http://www.hisensehvac.com> hhexport@hisense.com [Hisense HVAC](#) [Hisense HVAC](#) [Hisense HVAC](#)

HCAC-LL-ATWESP202304

★ Design and specifications are subject to change without notice. Pictures and diagrams are for reference only and are subject to change without notice. All rights reserved by Qingdao Hisense HVAC Equipment Co., Ltd.

Hisense

AIR TO WATER
HEAT PUMP

Hi-Therma



reddot winner 2022




reddot winner 2022

The Hi-Therma Series offers a stylish heating and cooling solution that was awarded the 2022 Reddot Award for its minimalist yet sophisticated design. It has clean lines and a classic white and gray color scheme that complements any home decor style, achieving the perfect fusion of form and function.



Two Separate Temperature Cycles

Two temperature zones through the separate heating cycles is possible with the mixing valve kit, enabling different water temperatures for underfloor heating and the radiator.

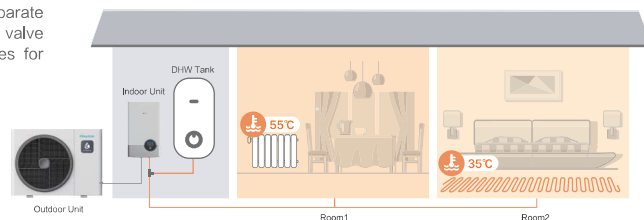


High Efficiency A+++

Hi-Therma offers the best and efficient solution for home heating and hot water supply. It has the top class A+++ energy classification under the low-temperature water condition, and A++ under the mid-temperature water condition, which ensures you make savings on your energy bills, reducing electricity consumption and the impact on the environment.



Up to 7 Rooms with Independent Temperature Control


In one Hi-Therma system, the temperature of up to 7 rooms can be independently controlled through installing temperature sensors or room-thermostats in the rooms, satisfying the diverse needs of users.

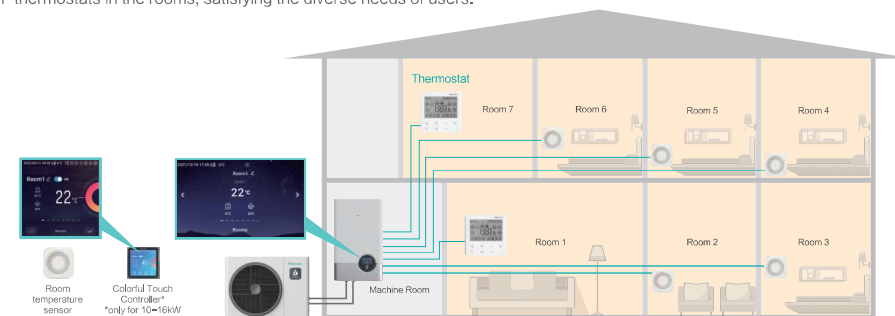

*Note: In one Hi-Therma system, up to 2 room thermostats and max. 6 wall mounted temp. sensors can be connected.

Smart App Control

Through the smart app, users can access the Hi-Therma system easily to control the room temperature at anytime and anywhere.



Hi-Mit II Adaptor





Simplified Installation

Hi-Therma Monobloc unit featuring all-in-one design allows easy installation without additional refrigerant piping work and refrigerant charge. Only the connection of water pipes is required on site, which greatly simplifies the on-site installation work.



Water side items included in the Monobloc



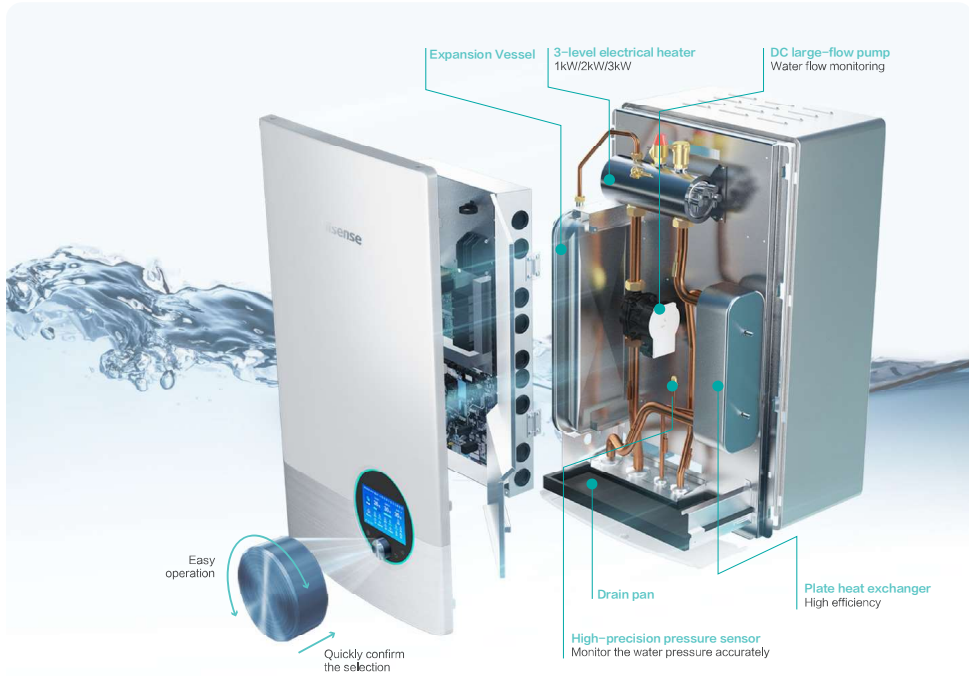

Colorful Touch Controller*

Access and customize your device's important settings with ease through the colorful touch controller, enabling precise temperature and mode adjustments with just a few taps.



HSXM-FE01

- ◆ Sleek and elegant design
- ◆ Compact, measures only 90 × 90mm
- ◆ Intuitive touch-button control

*Note: Optional for HI-therma Integra and Split 10~16kW.

One-click Configuration

Configure your device with ease using the new "One-click Configuration" feature that allows for quick setup in just 3 simple steps, with the ability to preset up to 6 scenarios for ultimate convenience and simplicity.*

*Note: Only supports pre-stored maximum of 6 scenarios.



Stylish Controller in Indoor Unit

Excellent human-computer interaction experience

The indoor unit has a built-in large colorful screen wired controller, which can be easily operated through the knob and the buttons, and all water cycles and rooms can be configured separately. The main interface can intuitively displays the settings of each water cycles and the current water temperature in real time. The LED light strip around the wire controller can intuitively indicate the current operating mode.



Energy consumption display

Energy data can be viewed easily, including annual energy data, monthly energy data, daily energy data, which will help users to do effective energy management.

Light strip

The intuitive light strip shows you in real time the status of your system.

Blue: cooling mode or defrost mode.
Yellow: heating mode.
Orange: domestic hot water mode.
Red: malfunction



Quick access

Quick access to frequent settings, including six items – lock, DHW boost, holiday, quiet mode, auto heat, night-shift mode. All these functions can be activated according to users' need.

Fluency of knob operation

All the operations can be accessed through the knob smoothly.

High-resolution colorful screen

The HD colorful screen delivers stunning and clear visual reference, enabling excellent user experience.

Proper interface zones

There are four functional zones, Cycle 1, Cycle 2, DHW, SWP. Each zone has intuitive parameter display, easy to check and set.

Plate Heat Efficiency and Anti-Freeze

Hi-Therma Integra is equipped with advanced major components including a high-efficiency plate heat exchanger, DC large-flow pump, 3-level electric heater, and large volume water tank, ensuring the in-house installation is easy and free of water freezing issues.



Premium Stainless Steel Water Tank

Featuring a DUPLEX 2205 material that delivers high-quality water with minimal maintenance costs, the water tank also comes standard with electric heating and sterilization functions that can be controlled separately. For areas with poor water quality, the optional electronic anode provides an extra layer of protection for enhancing corrosion resistance and extending the tank's lifespan.

High Efficiency A+++^{*1} A+^{*2}


Eco-Friendly Refrigerant R32

The R32 Refrigerant meets the F-gas regulation standards described in EU regulation 517/2014. The Hisense Hi-Therma heat pump system adopts and fully utilizes the R32 Refrigerant, which is a good solution for achieving the new European CO₂ emission targets.

Features

- ◆ Zero Ozone Depletion Potential (ODP)
- ◆ Lower Global Warming Potential (GWP)
- ◆ Less charge amount under the same capacity
- ◆ Single component refrigerant, easy to handle and recycle

R32

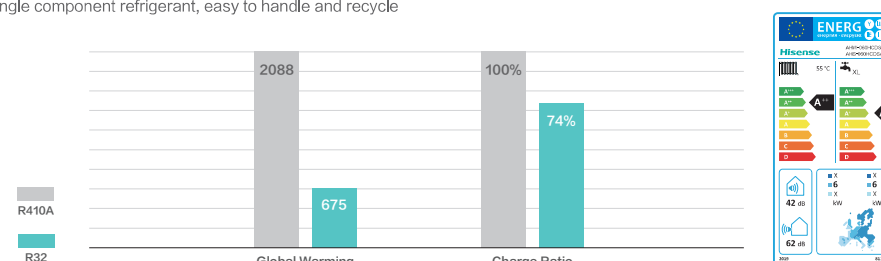

Notes: 1. ^{*1} SCOP up to 5.00 (Average climate / Low temp. application) : A+++; SCOP up to 3.42 (Average climate / Mid temp. application) : A+
^{*2} DHW Efficiency $\eta = 135\%$, profile XL: A+
 2. Followed by (EU) No 811/2013, (EU) No 813/2013, (EU) No 814/2013

Save Space


Integration of the water tank and control components together can save you up to 30% space in your home or facility, giving you more opportunities and possibilities to use your space for other things.



Note: *Compared to Hi-Therma Split + 230L DHW Tank.

Easy Transportation


Especially designed with a one-piece-fits-all size, transporting or moving it with any cart or trolley becomes easy and convenient. Place it wherever you like without a hassle.

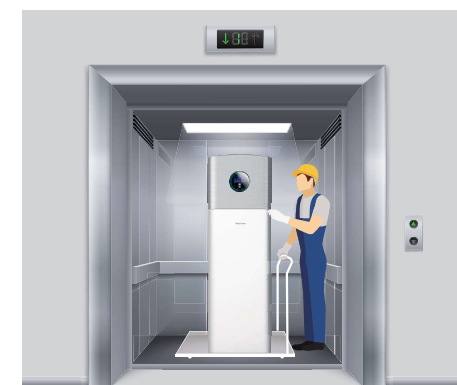



Zero Cold Water

With a circulating pump equipped in pipeline, Integra can cycle cold water into the heater, creating a constant flow of heat within the pipeline, for continuous hot water. No buffer time required. Your entire house or facility will always have set-temperature hot water for instant use.

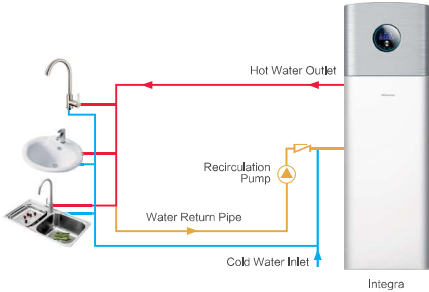

High Efficiency and Excellent Performance



User Convenience



High Intelligence



Easy Installation and Maintenance



Product Lineup Overview

	Series	Max Temp. of Outlet Water	Power Supply	Capacity		
Hi-Therma	R32	60°C	AC1ϕ, 220~240V/50Hz	4,4 kW		
				6,0 kW		
				8,0 kW		
	R32	(Preview)	AC1ϕ, 220~240V/50Hz (AC 3ϕ, 380~415V/50Hz)	10,0 kW		
		65°C		12,0 kW		
				14,0 kW		
				16,0 kW		
	R32	60°C	AC1ϕ, 220~240V/50Hz	4,4 kW		
				8,0 kW		
	R32	(Preview)	AC1ϕ, 220~240V/50Hz (AC 3ϕ, 380~415V/50Hz)	10,0 kW		
		65°C		12,0 kW		
				14,0 kW		
				16,0 kW		
	R32	60°C	AC1ϕ, 220~240V/50Hz	4,4 kW		
				6,0 kW		
				8,0 kW		
	R32	(Preview)	AC1ϕ, 220~240V/50Hz (AC 3ϕ, 380~415V/50Hz)	10,0 kW		
		65°C		12,0 kW		
14,0 kW						
16,0 kW						

Specification

Split (4~8kW)



HP				2.0		2.5		3.0	
Model		Outdoor Unit		AHM-Q44HCDS1		AHM-Q68HCDS1		AHM-Q80HCDS1	
Power Supply				AC 1φ, 220-240V/50Hz		AC 1φ, 220-240V/50Hz		AC 1φ, 220-240V/50Hz	
Nominal Heating Operation ¹	OAT (DBWB) 7/6℃	IWT/OWT 30 / 35℃	Capacity (Min./Nom./Max.)	kW	1.85 / 4.40 / 7.00	1.95 / 6.00 / 8.90	2.10 / 8.00 / 11.0		
			COP (Nom./Max.)	—	5.10/5.00	5.00/4.64	4.90/4.31		
		IWT/OWT 47 / 55℃	Capacity	kW	6.00	7.50	9.00		
			COP	—	2.90	2.96	2.75		
	OAT (DBWB) 2/1℃	IWT/OWT 30 / 35℃	Capacity	kW	6.10	7.20	8.50		
			COP	—	3.93	3.34	3.38		
		IWT/OWT 47 / 55℃	Capacity	kW	5.20	6.60	7.20		
			COP	—	2.27	2.32	2.15		
	OAT (DBWB) -7 / -8℃	IWT/OWT 30 / 35℃	Capacity	kW	5.00	5.90	7.30		
			COP	—	2.51	2.38	2.26		
		IWT/OWT 47 / 55℃	Capacity	kW	4.20	5.10	6.40		
			COP	—	1.83	1.81	1.82		
Nominal Cooling Operation ¹	OAT (DB) 35℃	IWT/OWT 12 / 7℃	Nominal Capacity	kW	4.40	5.20	6.00		
			EER	—	3.90	3.70	3.60		
		IWT/OWT 23 / 18℃	Nominal Capacity	kW	5.60	6.20	7.00		
			EER	—	5.60	5.60	5.10		
	Water Outlet 35℃	SCOP	—	—	5.00	4.93	4.92		
		Seasonal Heating Efficiency (ηs)	%	—	197	194	194		
		Energy Rating	—	—	A+++	A+++	A+++		
		SCOP	—	—	3.23	3.33	3.42		
	Water Outlet 55℃	Seasonal Heating Efficiency (ηs)	%	—	126	130	134		
		Energy Rating	—	—	A++	A++	A++		
		SEER	—	—	8.87	8.73	8.54		
		Seasonal Cooling Efficiency (ηs)	%	—	352	346	339		
Water Outlet 18℃	SEER	—	—	5.75	5.85	5.73			
	Seasonal Cooling Efficiency (ηs)	%	—	227	231	226			
	Sound Pressure ³	Normal Mode (Heating/Cooling)	dB(A)	—	47/47	48/47	50/47		
		Low Noise Mode (Heating/Cooling)	dB(A)	—	39/39	42/42	43/43		
Normal Mode (Heating/Cooling)		dB(A)	—	35/35	38/38	39/39			
Normal Mode (Heating/Cooling)		dB(A)	—	61/61	62/61	64/61			
Sound Power	Condenser Fan Quantity	—	—	1	1	1			
	Air Flow Rate	m³/h	—	2700	2700	2700			
Fan	Recommended Fuse	A	—	16	16	20			
	Outer Dimensions	mm	—	750 × 900 × 340	750 × 900 × 340	750 × 900 × 340			
Packing Dimensions	Height × Width × Depth	mm	—	807 × 1022 × 445	807 × 1022 × 445	807 × 1022 × 445			
	Weight(Net/Gross)	kg	—	48.5/52.5	48.5/52.5	49.0/53.5			
Refrigerant System	Compressor	Type	—	—	Rotary	Rotary	Rotary		
		Refrigerant Charge	—	—	R32	R32	R32		
	Piping	Before Shipment	kg	—	0.98	0.98	1.05		
		Gas Pipe	mm(φ)	—	φ12.7(1/2)	φ12.7(1/2)	φ15.88(5/8)		
		Liquid Pipe	mm	—	φ6.35(1/4)	φ6.35(1/4)	φ6.35(1/4)		
		Min. Piping Length	m	—	4	4	4		
	Max. Chargeless Piping Length	Max. Piping Length	m	—	8	8	8		
		Max. Piping Length	m	—	40	40	45		
	Height Difference between ODU and IDU	ODU is Higher	m	—	30	30	30		
		IDU is Higher	m	—	20	20	20		
	Operation Range	Heating	Outdoor Ambient Temperature	℃ (DB)	—	-25~35	-25~35		
		DHW	Outdoor Water Temperature	℃ (DB)	—	15~60	15~60		
Cooling		Outdoor Ambient Temperature	℃ (DB)	—	5~46	5~46			
		Outdoor Water Temperature	℃	—	5~22	5~22			
Indoor Unit				AHM-Q44HCDSAA		AHM-Q68HCDSAA		AHM-Q80HCDSAA	
Power Supply				—		AC 1φ, 220-240V/50Hz		—	
Water Flow Rate				IWT: 30℃ / OWT: 35℃ ΔT: 5℃		m³/h		1.30	
Min. Water Flow Rate				IWT: 47℃ / OWT: 55℃ ΔT: 8℃		m³/h		0.65	
DC Water Pump				Net Lift Pressure		m		4.7	
				Max. Lift Pressure		m		7.0	
				Max. Water Flow Rate		m³/h		3.5	
				Energy Efficiency Class		—		A	
				Speed		—		Inverter	
				Max. Power Input		W		50	
				Water Electric Heater (3 Steps)		kW		1/2/3	
Shut-off Valve with Filter				Material		—		Brass	
				Diameter		in.		1"	
				Mesh Filter		—		50	
				Type Filter		—		Self-cleaning (with back flush)	
				Safety Valve		bar		3	
				Shut-off Valve		—		2 pcs Supplied	
				Sound Pressure		dB(A)		28	
				Sound Power		dB(A)		42	
				Recommended Fuse		A		20(40 ⁵)	
Outer Dimensions(with connections)				Height × Width × Depth		mm		890 × 520 × 320	
Packing Dimensions				Height × Width × Depth		mm		419 × 1160 × 650	
				Weight(Net/Gross)		kg		41.5/48.5	
Refrigerating Installation				Connection Type		—		Flare Nut Connection	
				Gas Pipe		mm(φ)		φ12.7(1/2)	
				Liquid Pipe		mm(φ)		φ6.35(1/4)	
Water Installation				Connection Type		—		Screwed Connection	
				Shut-down valves		in.		G1" × G1" (female)	
				Inlet pipe diameter		in.		G1" (male)	
				Outlet pipe diameter		in.		G1" (male)	

NOTES:

¹: Heating/Cooling nominal performances at full load conditions according to EN 14511. Pipe length 7.5 m; height difference ODU/IDU 0 m; heating performance are integrated (included defrost cycles).²: According to EN14825, Climate Zone AVERAGE, Energy efficiency scale from A +++ to D.³: The above noise values are measured in the anechoic chamber without reflected echo, therefore the impact of the reflected echo must be taken into consideration at the scene.⁴: When there is an DHW electric heater mounted in the DHW tank, the setting temperature can reach 75℃.⁵: The value is the data when electric heater is working.

OAT: Outdoor ambient temperature; IWT: Inlet water temperature; OWT: Outlet water temperature

Specification

Monobloc (4~8kW)



Model					AHZ-Q44HCDS1		AHZ-Q80HCDS1	
Power Supply					220~240V ~ 50Hz			
Heating Operation*1	OAT (DB/WB) 7/6℃	IWT/OWT 30 / 35℃	Capacity(Min./Nom./Max.)	kW	1.85 / 4.40 / 7.00		2.10/ 8.00 / 11.0	
			COP (Nom.)	—	5.10		4.90	
		IWT/OWT 47 / 55℃	Capacity (Nom./Max.)	kW	4.40 / 6.00		8.00 / 9.00	
			COP (Nom.)	—	3.00		2.80	
	OAT (DB/WB) -7 / -8℃	IWT/OWT 30 / 35℃	Capacity (Nom./Max.)	kW	4.40 / 5.00		5.80 / 7.30	
			COP (Nom.)	—	3.26		3.14	
		IWT/OWT 47 / 55℃	Capacity (Nom./Max.)	kW	4.00 / 4.20		5.00 / 6.40	
			COP (Nom.)	—	1.97		1.94	
Cooling Operation*1	OAT (DB/WB) 35~℃	IWT/OWT 12 / 7℃	Nominal Capacity	kW	4.40		6.50	
			EER	—	4.00		3.35	
		IWT/OWT 23 / 18℃	Nominal Capacity	kW	5.60		7.00	
			EER	—	5.60		5.10	
Seasonal Performance*2	Water Outlet 35℃	SCOP		—	5.17		5.00	
		Seasonal Heating Efficiency (ηs)		%	204		197	
		Energy Rating		—	A+++		A+++	
	Water Outlet 55℃	SCOP		—	3.47		3.50	
		Seasonal Heating Efficiency (ηs)		%	136		137	
		Energy Rating		—	A++		A++	
Sound Pressure*3	Normal Mode (Heating/Cooling)		dB(A)	47/47		50/47		
	Low Noise Mode (Heating/Cooling)		dB(A)	40/40		43/43		
	Night Shift Mode (Heating/Cooling)		dB(A)	36/36		39/39		
Sound Power	Normal Mode (Heating/Cooling)		dB(A)	61/61		64/61		
Fan	Condenser Fan Quantity		—	1		1		
	Air Flow Rate		m³/h	2700		2700		
	Max. Running Current		A	10.53		17.53		
Recommended Fuse			A	16		20		
Outer Dimensions	Height × Width × Depth		mm	815 × 1270 × 340		815 × 1270 × 340		
Packing Dimensions	Height × Width × Depth		mm	890 × 1400 × 440		890 × 1400 × 440		
Net Weight			kg	88		88		
Gross Weight			kg	104		105		
Refrigerant System	Compressor	Type	—	Rotary				
	Refrigerant Charge	Type	—	R32				
Operation Range	Heating	Before Shipment	kg	1.17		1.21		
		Outdoor Ambient Temperature	℃ (DB)	~25~35				
		Outlet Water Temperature	℃	15~60				
	DHW	Outdoor Ambient Temperature	℃ (DB)	~25~40				
		Tank Water Temperature	℃	30~55(75*)				
		Outdoor Ambient Temperature	℃ (DB)	5~46				
Cooling	Outlet Water Temperature	℃	5~22					
	Nominal Water Flow		IWT: 30℃ / OWT: 35℃ ΔT: 5℃	m³/h	0.77	1.38		
			Min. Water Flow Rate	m³/h	0.50	0.50		
DC Water Pump		Max. Lift Pressure	m	9				
		Max. Water Flow Rate	m³/h	4.5				
		Speed	—	Inverter				
		Max. Power Input	W	87				
Water Electric Heater			kW	External (Optional)				
Safety Valve			bar	3				
Shut-off Valve			—	2 pcs Supplied				
Water Installation	Connection Type		—	Screwed Connection				
	Shutdown Valves		in.	G 1" - G 1" (female)				
	Inlet Pipe Diameter		in.	G 1" (female)				
	Outlet Pipe Diameter		in.	G 1" (female)				

Specification

Integra (4~8kW)
System Performance

Model				AHS-044HCDSA-23 + AHW-044HCDS1	AHS-060HCDSA-23 + AHW-060HCDS1	AHS-080HCDSA-23 + AHW-080HCDS1
OAT(DB/MWB)	IWT / OWT	—		Heating operation		
		Capacity (Min./Nom./Max.)		1.85 / 4.40 / 7.00	1.95 / 6.00 / 8.90	2.10 / 8.00 / 11.0
Heating	7/6℃	30/35℃	COP (Nom.)	—	5.10	4.90
			Capacity (Nom./Max.)	kW	4.40 / 6.00	6.00 / 7.50
Heating	-7/-8℃	30/35℃	COP (Nom.)	—	3.00	2.80
			Capacity (Nom./Max.)	kW	4.40 / 5.00	5.30 / 5.90
Cooling	35/-℃	12/7℃	COP (Nom.)	—	3.26	3.16
			Capacity (Nom./Max.)	kW	4.00 / 4.20	4.70 / 5.10
		23/18℃	COP (Nom.)	—	1.97	1.94
			Nominal capacity	kW	4.40	5.00
			EER	—	3.90	3.60
			Nominal capacity	kW	5.60	6.00
			EER	—	5.60	5.10
			ODU sound pressure normal mode (Heating/Cooling)	dB(A)	47/47	50/47
			ODU sound power normal mode (Heating/Cooling)	dB(A)	61/61	64/61
Water outlet 35℃			SCOP	—	5	4.93
			Seasonal heating efficiency (η _s)	—	197	194
Water outlet 55℃			Energy rating	—	A+++	A+++
			SCOP	—	3.23	3.42
			Seasonal heating efficiency (η _s)	—	126	130
			Energy rating	—	A++	A++
DHW energy efficiency class			Efficiency η _{DHW}	—	A+	A+
			Efficiency η _{DHW}	—	135%	135%
Outdoor Unit			Outer Dimensions	mm	750 × 900 × 340	750 × 900 × 340
			Packing Dimensions	mm	807 × 1022 × 445	807 × 1022 × 445
			Net Weight	kg	48.5	49.0
			Gross Weight	kg	52.5	53.5

Integra Specification

Model		AHS-044HCDSA-23	AHS-060HCDSA-23	AHS-080HCDSA-23
Water tank volume		L	230	230
Water tank material		—	DUPLEX 2205	
Power supply		—	AC 1ϕ, 220-240V/50Hz	
Dimensions		Height × Width × Depth	mm	1885 × 595 × 625
Packing Dimensions		Height × Width × Depth	mm	2070 × 700 × 710
Net Weight		kg	124.5	125.0
Gross Weight		kg	145.0	145.5
Water flow rate		m³/h	0.76	1.38
Water pump type		—	DC Inverter	
Static pressure at nominal flow (Standard/High resistance mode)		mwc	7.0/9.0	8.0/9.0
Available External pump head (Standard/High resistance mode)		mwc	5.5/8.0	3.0/6.0
E-heater for heating		kW	1+1+1	1+1+1
Sound power level		dB(A)	42	42
Working range (Heating)	Outdoor ambient temperature	℃(DB)	-25~35	
		℃	15~60*	
Working range (Cooling)	Outdoor ambient temperature	℃(DB)	5~46	
		℃	5~22	
Working range (DHW)	Outdoor ambient temperature	℃(DB)	-25~40	
		℃	30~55(75*)	
Space heating pipes connection	Inlet pipe diameter	mm (in.)	G1"(female)	
		mm (in.)	G1"(female)	
DHW pipes connection	Inlet pipe diameter	mm (in.)	G3/4"(female)	
		mm (in.)	G3/4"(female)	
Refrigerating connection	Connection type	—	Flare Nut Connection	
		mm (in.)	Φ6,35 (1/4")	
	Liquid pipe	mm (in.)	Φ6,35 (1/4")	
		mm (in.)	Φ12,70 (1/2")	

Specification

Split (10~16kW) Preview

Outdoor Unit	Power Supply	AC 1ϕ, 220-240V/50Hz		—	AHW-100HCDS1	AHW-120HCDS1	AHW-140HCDS1	AHW-160HCDS1	
		AC 3ϕ, 380-415V/50Hz		—	AHW-100HCDS1	AHW-120HCDS1	AHW-140HCDS1	AHW-160HCDS1	
Nominal Heating Operation*1	OAT (DB/°F) 7/6℃	IWT/OWT 30 / 35℃	Capacity	kW	10	12	14	16	
		IWT/OWT 47 / 55℃	Capacity	kW	5.10	4.95	4.80	4.60	
			COP	—	10.0	12.0	14.0	15.5	
	OAT (DB/°F) -7 / -8℃	IWT/OWT 30 / 35℃	Capacity	kW	3.10	3.05	3.05	2.95	
		IWT/OWT 47 / 55℃	Capacity	kW	9.50	10.80	13.50	14.00	
			COP	—	3.10	3.00	2.85	2.80	
Nominal Cooling Operation*1	OAT (DB) 35℃	IWT/OWT 12 / 7℃	Capacity (Nom./Max.)	kW	8.5 / 9.9	10.0 / 11.5	11.0 / 13.0	13.0 / 14.0	
			EER (Nom.)	—	3.00	2.85	2.85	2.70	
		IWT/OWT 23 / 18℃	Capacity (Nom./Max.)	kW	9.0 / 10.8	11.0 / 13.0	14.0 / 14.8	15.5 / 16.0	
		EER (Nom.)	—	4.5	4.1	4.1	3.9		
	Seasonal Performance*2	Water Outlet 35℃	SCOP	—	4.8	4.7	4.6	4.5	
			Seasonal Heating Efficiency (ηs)	%	188	185	180	177	
Energy Rating			—	A+++	A+++	A+++	A+++		
Water Outlet 55℃		SCOP	—	3.4	3.35	3.3	3.3		
		Seasonal Heating Efficiency (ηs)	%	133	130	128	127		
		Energy Rating	—	A++	A++	A++	A++		
Sound Pressure*3	Normal Mode	dB(A)	47	50	50	54			
	Low Noise Mode	dB(A)	43	46	46	48			
Sound Power	Night Shift Mode	dB(A)	42	42	44	44			
Fan	Normal Mode	dB(A)	61	64	64	67			
	Condenser Fan Quantity	—	—	1	1	1	1		
Outer Dimensions	Air Flow Rate	m³/h	5200	5200	4700	4700			
Packing Dimensions	Height × Width × Depth	mm	840 × 1100 × 390						
	Height × Width × Depth	mm	1000 × 1185 × 532						
	Weight(Net/Gross)	kg	73.5/88.0	73.5/88.0	91.5/105.5	91.5/105.5			
Refrigerant System	Compressor	Type	—	—	Rotary				
	Refrigerant Charge	Type	—	—	R32				
		Before Shipment	kg	1.8	1.8	2.7	2.7		
	Piping	Gas Pipe	mm(in.)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)		
		Liquid Pipe	mm	9.53 (3/8)	9.53 (3/8)	9.53 (3/8)	9.53 (3/8)		
	Min. Piping Length	m	4						
		Max. Chargeless Piping Length	m	15					
		Max. Piping Length	m	50					
	Height Difference between ODU and IDU	ODU is Higher	m	30	30	30	30		
		IDU is Higher	m	20	20	20	20		
Operation Range	Heating	Outdoor Ambient Temperature	℃ (DB)	-25~35					
		Outlet Water Temperature	℃	20~65					
	DHW	Outdoor Ambient Temperature	℃ (DB)	-25~43					
		Tank Water Temperature	℃	39~60 (75°F)					
	Cooling	Outdoor Ambient Temperature	℃ (DB)	5~46					
		Outlet Water Temperature	℃	5~22					
Indoor Unit	Power Supply	AC 1ϕ, 220-240V/50Hz	—	AHW-100HCDSA	AHW-120HCDSA	AHW-140HCDSA	AHW-160HCDSA		
		AC 3ϕ, 380-415V/50Hz	—	AHW-100HCDSA	AHW-120HCDSA	AHW-140HCDSA	AHW-160HCDSA		
Water Flow Rate	IWT: 30℃ / OWT: 35℃ ΔT: 5℃	m³/h	1.72	2.06	2.40	2.76			
	IWT: 47℃ / OWT: 55℃ ΔT: 8℃	m³/h	1.07	1.29	1.50	1.71			
DC Water Pump	Min. Water Flow Rate	m³/h	0.8	0.9	1.1	1.2			
	Max. Lift Pressure	m	12						
	Max. Water Flow Rate	m³/h	5.5						
	Speed	—	Inverter						
Shut-off Valve with Filter	Max. Power Input	W	180						
	Water Electric Heater (3 Steps)	kW	2/4/6						
Safety Valve	Diameter	in.	G1"						
	Mesh Filter	—	50						
Shut-off Valve	—	bar	3						
	—	—	2 pcs Supplied						
Sound Pressure	dB(A)	30	30	30	30	30			
	Sound Power	dB(A)	44	44	44	44			
Outer Dimensions(with connections)	Height × Width × Depth	mm	890 × 520 × 320						
Packing Dimensions	Height × Width × Depth	mm	419 × 1160 × 650						
Refrigerating Installation	Weight(Net/Gross)	kg	47/52	47/52	49/54	49/54			
	Connection Type	Gas Pipe	mm(in.)	15.88 (5/8)	15.88 (5/8)	Flare Nut	15.88 (5/8)	15.88 (5/8)	
		Liquid Pipe	mm(in.)	9.53 (3/8)	9.53 (3/8)	9.53 (3/8)	9.53 (3/8)		
	Water Installation	Connection type	—	Screwed Connection					
Shutdown valves			—	G1"—G1"(female)					
Inlet pipe diameter			in.	G1"(male)					
Outlet pipe diameter			in.	G1"(male)					

NOTES:

*1: Heating/Cooling nominal performances at full load conditions according to EN 14511, Pipe length 7.5 m; height difference ODU/IDU 0 m; heating performance are integrated (included defrost cycles).

*2: According to EN14825, Climate Zone AVERAGE, Energy efficiency scale from A+++ to D.

*3: The above noise values are measured in the anechoic chamber without reflected echo, therefore the impact of the reflected echo must be taken into consideration at the scene.

*4: When there is an DHW electric heater mounted in the DHW tank, the setting temperature can reach 75℃.

OAT: Outdoor ambient temperature; IWT: Inlet water temperature; OWT: Outlet water temperature

Specification

Monobloc (10~16kW) [Preview](#)

Model	Power Supply	AC 1 Φ, 220~240V/50Hz		—	AHZ=100HCDS1	AHZ=120HCDS1	AHZ=140HCDS1	AHZ=160HCDS1
		AC 3 Φ, 380~415V/50Hz		—	AHZ=100HEDS1	AHZ=120HEDS1	AHZ=140HEDS1	AHZ=160HEDS1
OAT (DB/WB)		IWT / OWT	—	Unit	—			
Heating Operation*1	7/6℃	30 / 35℃	Capacity (Nom.)	kW	10	12	14	16
			COP (Nom.)	—	5.1	4.95	4.8	4.6
		47 / 55℃	Capacity (Nom.)	kW	10	12	14	15.5
			COP (Nom.)	—	3.1	3.05	3.05	2.95
	-7 / -8℃	30 / 35℃	Capacity (Nom.)	kW	9.50	10.80	13.50	14.00
			COP (Nom.)	—	3.10	3.00	2.85	2.80
		47 / 55℃	Capacity (Nom.)	kW	8	8.5	10	11
			COP (Nom.)	—	2.15	2.1	2.05	2
Cooling Operation*1	35℃	12 / 7℃	Capacity (Nom.)	kW	8.5	10	11	13
			EER	—	3	2.85	2.85	2.7
		23 / 18℃	Capacity (Nom.)	kW	9	11	14	15.5
			EER	—	4.5	4.1	4.2	3.9
			SCOP		—	4.8	4.7	4.6
Water outlet 35℃	Seasonal heating efficiency (ηs)		%	188	185	180	177	
	Energy rating		—	A+++	A+++	A+++	A+++	
Water outlet 55℃	SCOP		—	3.4	3.35	3.3	3.3	
	Seasonal heating efficiency (ηs)		%	133	130	128	127	
	Energy rating		—	A++	A++	A++	A++	
Working range (Space Heating)	Outdoor ambient temperature			℃ (DB)	-25~35			
	Outlet water temperature			℃	20~65			
Working range (Space Cooling)	Outdoor ambient temperature			℃ (DB)	5~46			
	Outlet water temperature			℃	5~22			
Working range (DHW)	Outdoor ambient temperature			℃ (DB)	-25~43			
	Tank water temperature			℃	30~60(75*4)			
Sound pressure level				dB(A)	47	50	50	54
Sound power level				dB(A)	61	63	64	67
Sound pressure level (low noise mode)				dB(A)	43	46	46	48
Sound pressure level (night shift mode)				dB(A)	42	42	44	44
Outer Dimensions	Height			mm	840	840	840	840
	Width			mm	1376	1376	1376	1376
	Depth			mm	390	390	390	390
Space heating pipes connection	Inlet pipe diameter			in.	G 1" (female)			
	Outlet pipe diameter			in.	G 1" (female)			

NOTES:

*1: Heating/Cooling nominal performances at full load conditions according to EN 14511.

Pipe length 7.5 m; height difference ODU/IDU 0 m; heating performance are integrated (included defrost cycles).

*2: According to EN14825, Climate Zone AVERAGE, Energy efficiency scale from A+++ to D.

*3: The above noise values are measured in the anechoic chamber without reflected echo, therefore the impact of the reflected echo must be taken into consideration at the scene.

*4: When there is an DHW electric heater mounted in the DHW tank, the setting temperature can reach 75℃.

OAT: Outdoor ambient temperature; IWT: Inlet water temperature; OWT: Outlet water temperature

Specification

Integra (10~16kW) [Preview](#)

System Performance

Model				AHS-100HCDSAA-23 + AHW-100HCDS1		AHS-120HCDSAA-23 + AHW-120HCDS1		AHS-140HCDSAA-23 + AHW-140CDS1		AHS-160HCDSAA-23 + AHW-160HCDS1	
Power supply				AC 1 ϕ, 220-240V/50Hz							
Model				AHS-100HEDSAA-23 + AHW-100HEDS1		AHS-120HEDSAA-23 + AHW-120HEDS1		AHS-140HEDSAA-23 + AHW-140HEDS1		AHS-160HEDSAA-23 + AHW-160HEDS1	
Power supply				AC 3 ϕ, 380-415V/50Hz							
OAT (DB/WB)		IWT / OWT	—	Unit		—					
Heating	7/6℃	30/35℃	Capacity(Nom.)	kW	10		12		14		16
			COP(Nom.)	—	5.1		4.95		4.8		4.6
		47/55℃	Capacity(Nom.)	kW	10		12		14		15.5
			COP(Nom.)	—	3.1		3.05		3.05		2.95
	-7/-8℃	30/35℃	Capacity(Nom.)	kW	9.50		10.80		13.50		14.00
			COP(Nom.)	—	3.10		3.00		2.85		2.80
		47/55℃	Capacity(Nom.)	kW	8		8.5		10		11
			COP(Nom.)	—	2.15		2.1		2.05		2
Cooling	35/-℃	12/7℃	Capacity(Nom.)	kW	8.5		10		11		13
			EER	—	3		2.85		2.85		2.7
		23/18℃	Capacity(Nom.)	kW	9		11		14		15.5
			EER	—	4.5		4.1		4.2		3.9
Water outlet 35℃	SCOP		—	4.8		4.7		4.6		4.5	
		Seasonal heating efficiency (ηs)	%	188		185		180		177	
		Energy rating	—	A+++		A+++		A+++		A+++	
Water outlet 55℃	SCOP		—	3.4		3.35		3.3		3.3	
		Seasonal heating efficiency (ηs)	%	133		130		128		127	
		Energy rating	—	A++		A++		A++		A++	
DHW energy efficiency class			Load profile L	—	A+		A+		A+		
SCOP DHW			Load profile L	—	~3.0		~3.0		~2.9		~2.9
Outdoor Unit Outer Dimensions		Height × Width × Depth		mm	840 × 1100 × 390		840 × 1100 × 390		840 × 1100 × 390		840 × 1100 × 390

Integra Specification

Model			AHS=100HCDSAA=23	AHS=120HCDSAA=23	AHS=140HCDSAA=23	AHS=160HCDSAA=23
Power supply			AC 1 ϕ, 220~240V/50Hz			
Model			AHS=100HEDSAA=23	AHS=120HEDSAA=23	AHS=140HEDSAA=23	AHS=160HEDSAA=23
Power supply			AC 3 ϕ, 380~415V/50Hz			
Water TANK Volume		L	230	230	230	230
Water Tank material		—	DUPLEX 2205	DUPLEX 2205	DUPLEX 2205	DUPLEX 2205
Dimensions	Height × Width × Depth	mm	1885 × 590 × 625	1885 × 590 × 625	1885 × 590 × 625	1885 × 590 × 625
E=heater for heating		kw	2+2+2	2+2+2	2+2+2	2+2+2
Sound power level		dB(A)	42	42	42	42
Working range (Heating)	Outdoor ambient temperature	℃ (DB)	-25~35			
	Outlet water temperature	℃	20~65			
Working range (Cooling)	Outdoor ambient temperature	℃ (DB)	5~46			
	Outlet water temperature	℃	5~22			
Working range (DHW)	Outdoor ambient temperature	℃ (DB)	-25~43			
	Tank water temperature	℃	30~60(75°)			
Space heating pipes connection	Inlet pipe diameter	in.	G 1" (female)			
	Outlet pipe diameter	in.	G 1" (female)			
DHW pipes connection	Inlet pipe diameter	in.	G 3/4" (female)			
	Outlet pipe diameter	in.	G 3/4" (female)			
Refrigerating connection	Connection Type	—	Flare Nut Connection	Flare Nut Connection	Flare Nut Connection	Flare Nut Connection
	Liquid Pipe	mm (in.)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)
	Gas pipe	mm (in.)	9.53 (3/8)	9.53 (3/8)	9.53 (3/8)	9.53 (3/8)